

# FTPC30V-C series

30W LED Constant voltage Switching Power Supply with PFC function



## ■ Features:

- European AC Input
- Protections: Short circuit / Over current
- Cooling by free air convection
- Built-in active PFC function
- Isolation class II
- Extremely short case size



## © ELECTRICAL SPECIFICATION

MODEL	FTPC30V12-C	FTPC30V24-C
<b>OUTPUT</b>		
Rated Voltage	12V	24V
Rated Current	2.5A	1.25A
Rated Power	30W	
Power Range	0 ÷ 30W	
Line Regulation	± 1%	
Load Regulation	± 2%	
Voltage Tolerance	[2] ± 5%	
Ripple & Noise (max.)	[3] 180mV <sub>p-p</sub>	240mV <sub>p-p</sub>
Setup, Rise, Holdup time	[4] 500ms, 30ms, 15ms	
<b>INPUT</b>		
Voltage Range	180 ÷ 264VAC	
Frequency Range	47 ÷ 63Hz	
Power Factor (typ.)	PF > 0.9 / 230VAC at full load	
Efficiency (typ.)	85%	85%
AC current (typ.)	0.22A / 230VAC	
Inrush current (max.)	60A / 230VAC(25°C)	
No Load Power Consumption (max.)	0.5W	
<b>PROTECTIONS</b>		
Over Current	Range: 110 ÷ 140%	
	Type: Type: constant current limiting to 50% rated voltage next hiccup mode. Recovers automatically after fault condition is removed.	
Short Circuit	Type: hiccup mode. Recovers automatically after fault condition is removed.	

# FTPC30V-C series

30W LED Constant voltage Switching Power Supply with PFC function



## WORKING ENVIRONMENT

<b>Working Temperature</b>	-20°C ÷ 45°C
<b>Working Humidity</b>	20 ÷ 95% RH non-condensing
<b>Storage Temperature and Humidity</b>	-40°C ÷ 80°C, 10 ÷ 95% RH non-condensing
<b>Temperature Coefficient</b>	± 0.05% / °C (-10°C ÷ 45°C)
<b>Vibration</b>	10 ÷ 500Hz, 2G, 10min / cycle, period 30min. each along X, Y, Z axes

## SAFETY AND EMC REGULATIONS

<b>Safet Standards</b>	Compliance to EN61347-1, EN61347-2-13
<b>Withstand Voltage</b>	IN/OUT: 5.3kVDC/1min
<b>Isolation Resistance</b>	IN/OUT: 50MΩ/500VDC/25°C/70%
<b>EMC Emission</b>	Compliance to EN55015
<b>EMC Immunity</b>	Compliance to EN61547; EN61000-4-2, -3, -4, -5, -6, -8, -11; EN55024
<b>Harmonic Current</b>	Compliance to EN61000-3-3; EN61000-3-2 class C (≥ 100% load)


## OTHERS

<b>Dimensions</b>	156 x 50 x 17mm (L x W x H)
<b>Weight and Packing</b>	0.15kg; 50pcs./ctn; ctn dimensions: 25.5 x 20.5 x 16cm

<b>EAN Code</b>	 5 902135 117897	 5 902135 119228
-----------------	---	---

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Tolerance includes set up tolerance, line regulation and load regulation.
3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment must be re-qualify to comply with EMC Directives.

## © MECHANICAL SPECIFICATION

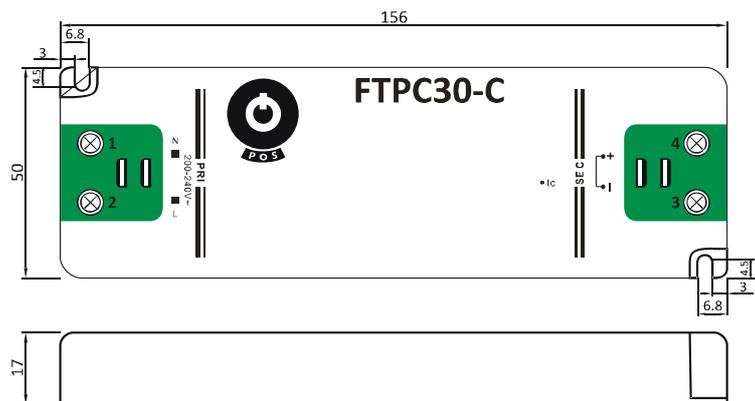

PIN ASSIGNMENT			
No.	Assignment	No.	Assignment
1	Input: AC/N	3	Output: U <sub>OUT-</sub>
2	Input: AC/L	4	Output: U <sub>OUT+</sub>