


EBD1212 series

Desktop 12V/1A

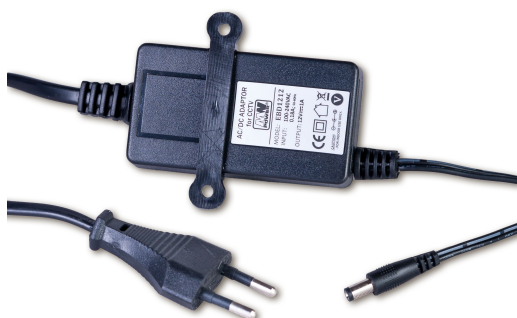

■ Features:

- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Isolation class II
- No load power consumption < 0.3W
- Low price

ELECTRICAL SPECIFICATION

MODEL	EBD1212
OUTPUT	
RATED VOLTAGE	12VDC
RATED CURRENT	1A
RIPPLE & NOISE (max.) [2]	120mV _{p.p}
RATED POWER	12W
LINE REGULATION	± 1%
LOAD REGULATION	± 3%
TOLERANCE [3]	± 5%
SETUP, HOLD UP TIME [4]	3000ms, 20ms / 230VAC at full load
INPUT	
VOLTAGE RANGE	90 ÷ 264VAC; 127 ÷ 370VDC
FREQUENCY RANGE	47 ÷ 63Hz
EFFICIENCY (typ.)	85%
AC CURRENT (typ.)	0.3A/115VAC, 0.15A / 230VAC
NO LOAD POWER CONSUMPTION (max.)	0.3W
PROTECTIONS	
OVERLOAD	Range: above 200% rated power
	Type: hiccup mode, auto-recovery.
SHORT CIRCUIT	Type: hiccup mode, auto-recovery.
OVER VOLTAGE	Range: 13V ÷ 16V
	Type: hiccup mode, auto-recovery.
OVER TEMPERATURE	Type: shut off output voltage. Auto-recovery.
WORKING ENVIRONMENT	
WORKING TEMPERATURE	-5°C ÷ 40°C
WORKING HUMIDITY	10 ÷ 90% RH non-condensing
STORAGE TEMPERATURE AND HUMIDITY	-20°C ÷ 60°C, 10 ÷ 90% RH non-condensing

EBD1212 series

Desktop 12V/1A



SAFETY AND EMC REGULATIONS

WITHSTAND VOLTAGE	I-P/O-P: 3kVAC
SAFETY STANDARDS	Compliance to EN60950-1
EMC EMISSION	Compliance to EN55022
EMC IMMUNITY	Compliance to EN55024
HARMONIC CURRENT	Compliance to EN61000-3-3; EN61000-3-2

OTHERS

TERMINALS	Input: wire 2 x 0.5mm ² with CEE 7/16 plug, length = 1000mm; Output: wire 22AWGx2C, length = 1500mm
DC PLUG	Female 2.1/ 5.5, V+ inside
DIMENSIONS	64.5*35*27(L*W*H)
WEIGHT	0.1kg; 100pcs./box; box weight and dimensions: 13kg; 47 x 33 x 33cm

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment must be re-qualify to comply with EMC Directives.

MECHANICAL SPECIFICATION

